

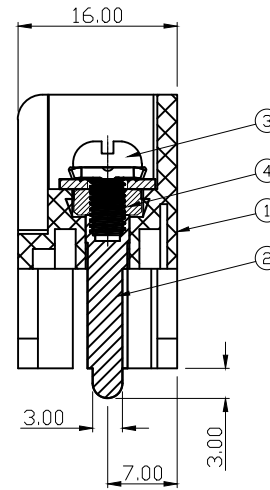
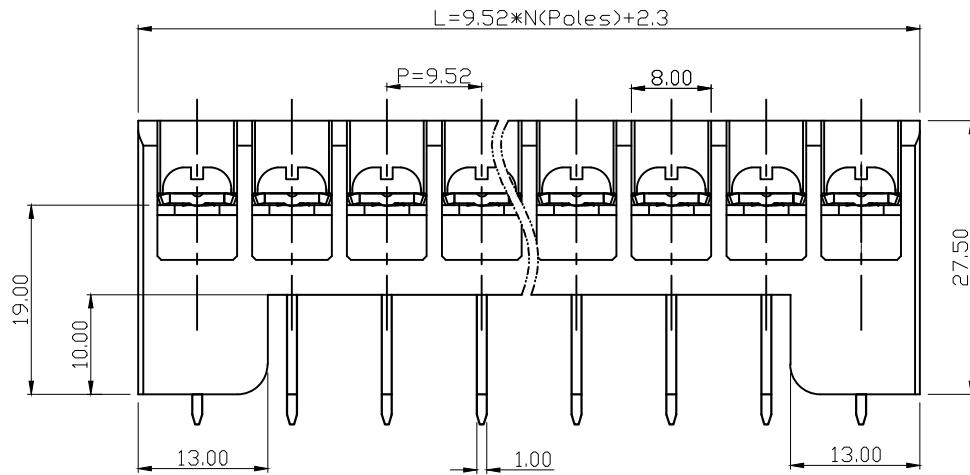


未注线性尺寸公差 Liner dimension tolerances

0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6

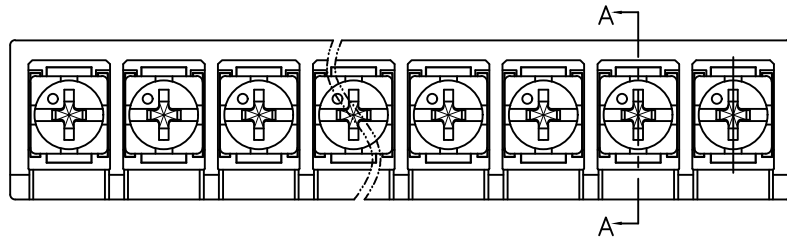

SECTION A-A

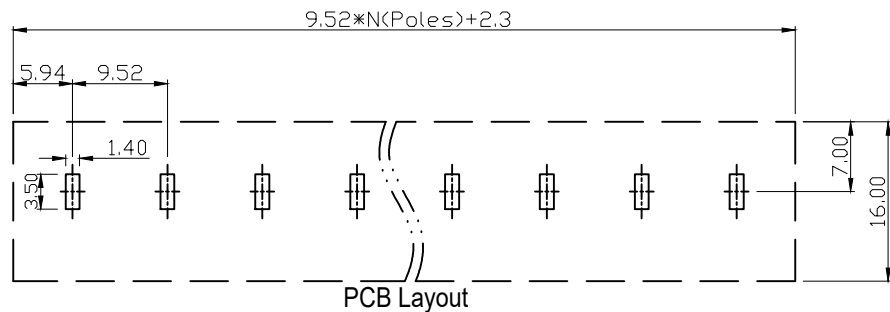

PCB Layout

REV	DESCRIPTION	DRW.	DATE
A	RELEASE		

UL 技术参数			
UL Technical Data			
等级	Use Group	B	C D
额定电压	Rated Voltage [V]	300	/ 300
额定电流	Rated Current [A]	20	/ 10
耐电压	Withstanding Voltage [V]	AC 2500V/1Min	
IEC 技术参数			
IEC Technical Data			
过压类别	Overvoltage Category	III	III II
污染等级	Contamination Class	3	2 2
额定电压	Rated Voltage [V]	500	630 630
额定电流	Rated Current [A]	32	32 32
冲击电压	Rate Impulse Voltage [KV]	6	6 6
一般参数 Other Data			
线径范围	Wire Range [AWG/mm <sup>2</sup> ]	22~12/0.5~4.0	
剥线长度	Stripping length [mm]	/	
位数范围	Poles	02~14P	
工作温度	Operating temperature [°C]	-40 ~ +105	
螺钉/扭力	Screw / Torque / lbf.in	M3.5/13	
环保要求	RoHS Compliant	YES	

4	Nut	Steel	Zn Plated
3	Screw	Steel	Zn Plated
2	Pin Header	Brass	SN Plated
1	Housing	PA66+GF	UL94-V0
ITEM	NAME	MATERIAL	NOTES

TYPE	CUSTOMER DRAWING 客户图档	PROJECTION	
DRFT	DATE	UNITS: MM	TITLE
CHKD	DATE	SCALE: 1:1	DWG NO.
APPD	DATE	SHEET 1 OF 1	

赋安连电气  
FORANY ELECTRIC

BA3-XX-9.52-10