
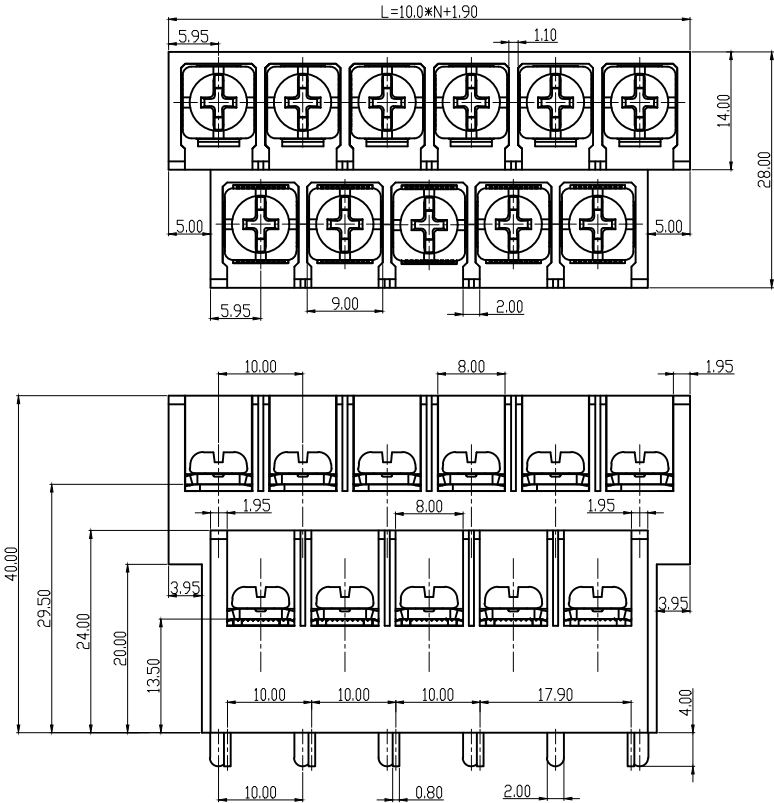


未注线性尺寸公差 Liner dimension tolerances						
0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6

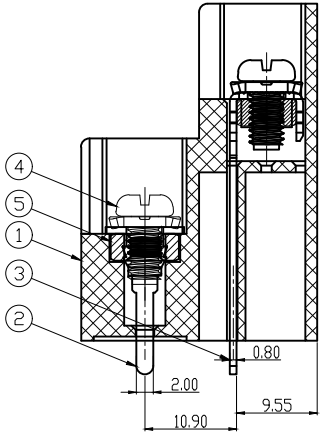

REV	DESCRIPTION	DRW.	DATE
A	RELEASE		

UL 技术参数					
UL Technical Data					
等级	Use Group		B	C	D
额定电压	Rated Voltage	[V]	300	300	300
额定电流	Rated Current	[A]	20	20	10
耐电压	Withstanding Voltage	[V]	AC 2500V/1Min		
IEC 技术参数					
IEC Technical Data					
过压类别	Overvoltage Category		III	III	II
污染等级	Contamination Class		3	2	2
额定电压	Rated Voltage	[V]	500	630	630
额定电流	Rated Current	[A]	32	32	32
冲击电压	Rate Impulse Voltage	[KV]	6	6	6
一般参数 Other Data					
线径范围	Wire Range	[AWG/mm ²]	22~12/0.5~2.5		
剥线长度	Stripping length	[mm]	/		
位数范围	Poles		2P~14P		
工作温度	Operating temperature	[°C]	-40 ~ +105		
螺钉/扭力	Screw / Torque	[lbf.in	M4/13		
环保要求	RoHS Compliant		YES		

5	Nut	C1022	Ni Plated
4	Screw	C1022	Ni Plated
3	Pin header2	H62(Y2)	SN Plated
2	Pin header1	H62(Y2)	SN Plated
1	Housing	PA66+GF15%	UL94-V0
ITEM	NAME	MATERIAL	NOTES

TYPE		CUSTOMER DRAWING		PROJECTION		UNIT		TITLE	
DRFT		刘秀海		DATE		2026.03.15		UNITS: MM	
CHKD		曾裕辉		DATE		2026.03.15		SCALE: 1:1	
APPD		陈柏林		DATE		2026.03.15		SHEET 1 OF 1	
								DWG NO.	



BA5-11-10.0-10