

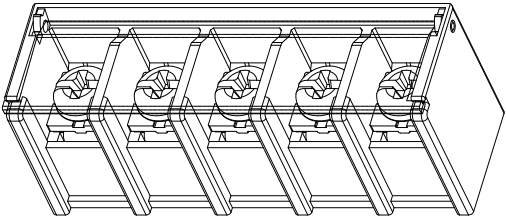


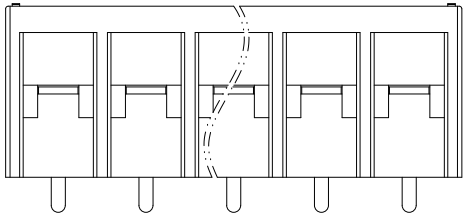
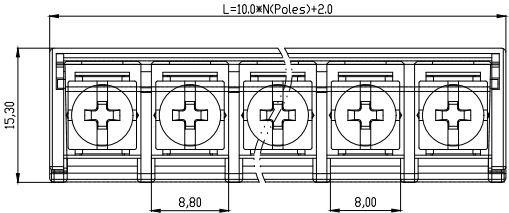



未注线性尺寸公差 Liner dimension tolerances						
0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6

REV	DESCRIPTION	DRW.	DATE
A	RELEASE		

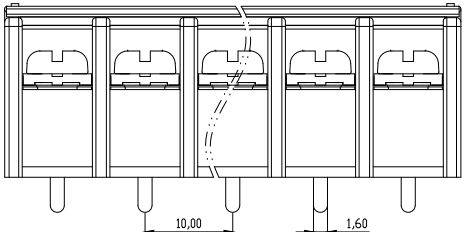

Opening height

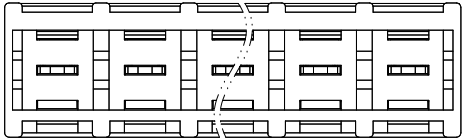


UL 技术参数				
UL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	/	300
额定电流	Rated Current [A]	20	/	10
耐电压	Withstanding Voltage [V]	AC 1600V/1Min		
IEC 技术参数				
IEC Technical Data				
过压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	500	630	630
额定电流	Rated Current [A]	32	32	32
冲击电压	Rate Impulse Voltage [KV]	6	8	6
一般参数 Other Data				
线径范围	Wire Range [AWG/mm ²]	22~12/0.5~4.0		
剥线长度	Stripping length [mm]	/		
位数范围	Poles	02~24P		
工作温度	Operating temperature [°C]	-40 ~ +105		
螺钉/扭力	Screw / Torque [lbf.in]	M4/13		
环保要求	RoHS Compliant	YES		

5	Cover	PC	UL94-V2
4	Nut	STEEL	Ni Plated
3	Screw	STEEL	Ni Plated
2	Pin header	BRASS	Sn Plated
1	Housing	PA66+GF15%	UL94-V0
ITEM	NAME	MATERIAL	NOTES



TITLE			
BA5-XX-10. 0-09-C装配图			
DWG NO.	XXXX		

TYPE		CUSTOMER DRAWING		客户图档		PROJECTION		UNITS: MM	
DRFT	刘雄杰	DATE	2026. 07. 29	UNITS: MM					
CHKD	梁春华	DATE	2026. 07. 29	SCALE: 1:1					
APPD	曾裕辉	DATE	2026. 07. 29	SHEET 1 OF 1					

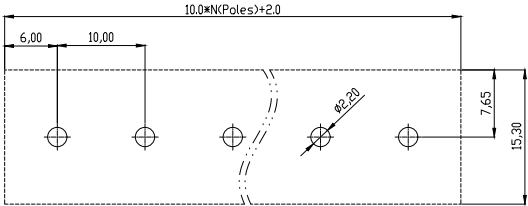

PCB LAYOUT