
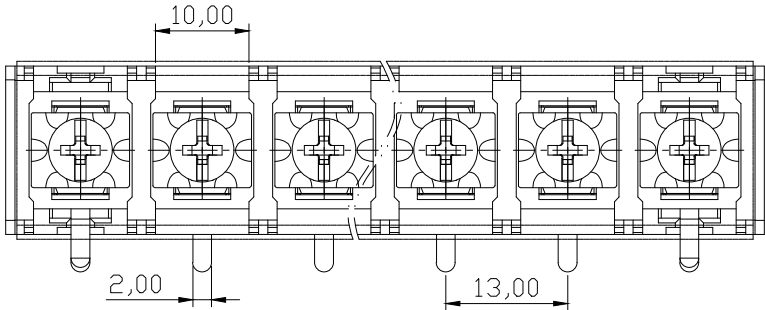
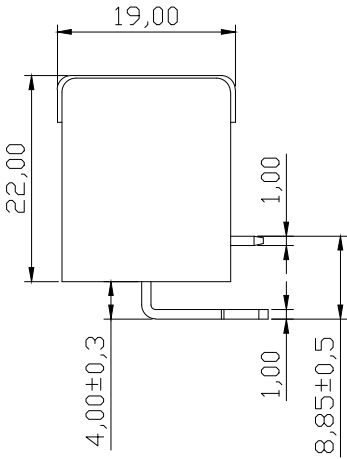
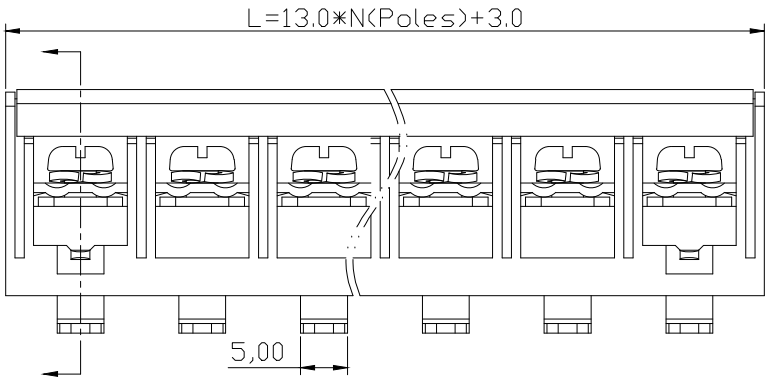



未注线性尺寸公差 Liner dimension tolerances							—		
0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160	0~10	>10~100	>100
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6	±0.1	±0.3	±0.6

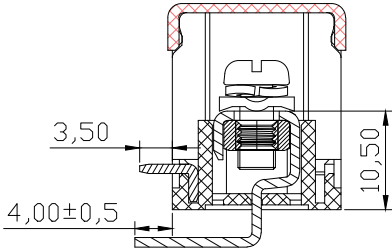

REV	DESCRIPTION	DRW.	DATE
-	RELEASE		

UL 技术参数				
UL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	40	40	5
耐电压	Withstanding Voltage [V]	AC 2200V/1Min		
IEC 技术参数				
IEC Technical Data				
过压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	800	1000	1000
额定电流	Rated Current [A]	40	40	40
冲击电压	Rate Impulse Voltage [kV]	8	8	8
一般参数 Other Data				
线径范围	Wire Range [AWG/mm²]	18~10/0.5~6.0		
剥线长度	Stripping length [mm]	10~12		
位数范围	Poles	02~22P		
工作温度	Operating temperature [°C]	-40 ~ +105		
螺丝扭矩	Screw torque(Max) [mm]	/		
环保要求	RoHS Compliant	YES		

6	Screw	Steel	NI Plated	LD403202	1N
5	Nut	Steel	NI Plated	LM4螺母	1N
4	Position_Pin	Brass	SN Plated	BA8-XX-13.0-07插销	2
3	Pin	Brass	SN Plated	BA8-XX-13.0-02引脚	1N
2	Cover	PC	UL94-V0	BA8-XX-13.0-00-C盖子	1
1	Housing	PA66GF	UL94-V0	BA8-XX-13.0-07 外壳	1
ITEM	NAME	MATERIAL	NOTES	PART	QTY




赋安连电气
FORANY ELECTRIC

TITLE BA8-XX-13.0-07-C

UNITS: mm SCALE: 1:1 SHEET 1 OF 1

DWG NO:

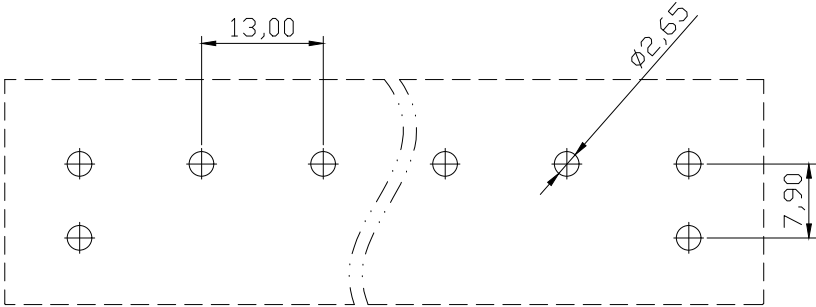

PCB LAYOUT

TYPE
CUSTOMER DRAWING
客户图档

DRFT		DATE	
CHKD		DATE	
APPD		DATE	