
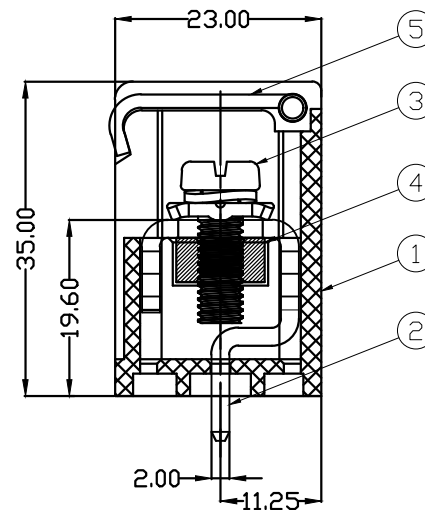


未注线性尺寸公差 Liner dimension tolerances

0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6

REV	DESCRIPTION	DRW.	DATE
A	RELEASE		

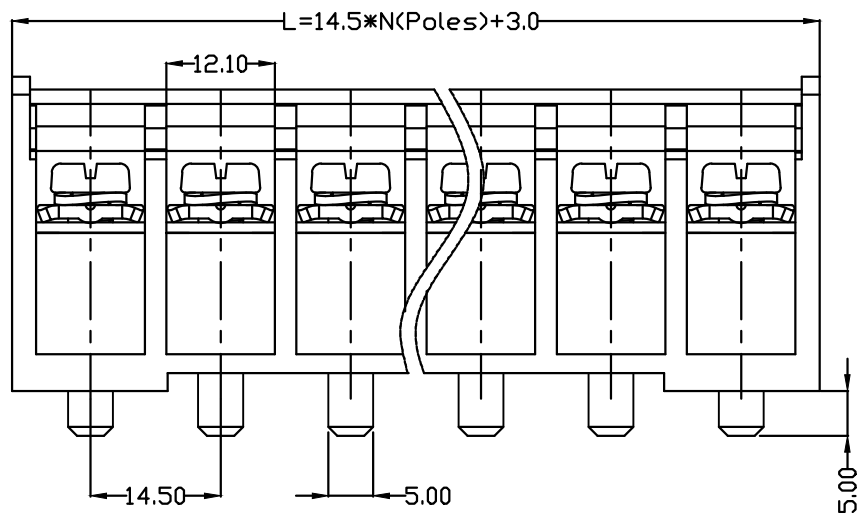

UL 技术参数

UL Technical Data

等级	Use Group		B	C	D
额定电压	Rated Voltage	[V]	600	600	600
额定电流	Rated Current	[A]	65	65	5
耐电压	Withstanding Voltage	[V]	AC 3000V/1Min		


IEC 技术参数

IEC Technical Data

过压类别	Overvoltage Category		III	III	II
污染等级	Contamination Class		3	2	2
额定电压	Rated Voltage	[V]	630	1000	1000
额定电流	Rated Current	[A]	76	76	76
冲击电压	Rate Impulse Voltage	[KV]	8	8	6

一般参数 Other Data

线径范围	Wire Range [AWG/mm ²]	22~8/0.5~16
剥线长度	Stripping length [mm]	/
位数范围	Poles	2P~12P
工作温度	Operating temperature [°C]	-40 ~ +105
螺钉/扭力	Screw / Torque / lbf.in	M5/25
环保要求	RoHS Compliant	YES

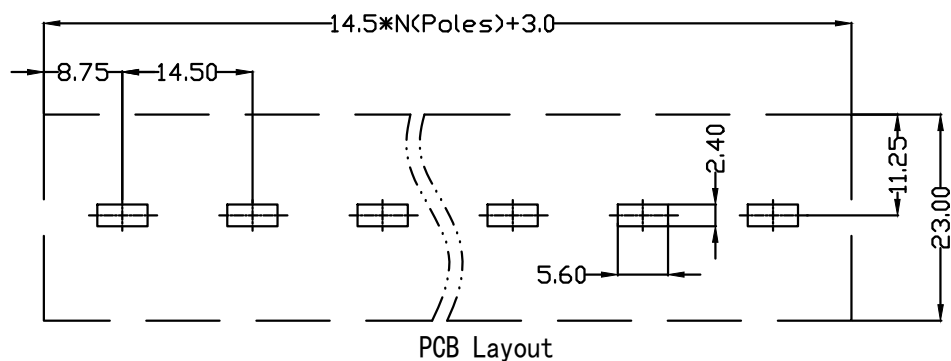

5	Cover	PC	/
4	Nut	C1018	Zn Plated
3	Screw	C1022	Ni Plated
2	Pin header	H62(Y2)	SN Plated
1	Housing	PBT+GF30%	UL94-V0
ITEM	NAME	MATERIAL	NOTES

TYPE	CUSTOMER DRAWING 客户图档	PROJECTION	
DRFT	刘秀海	DATE	2026.03.15
CHKD	曾裕辉	DATE	2026.03.15
APPD	陈柏林	DATE	2026.03.15
		UNITS: MM	
		SCALE: 1:1	
		SHEET 1 OF 1	

		TITLE	BA8-XX-14.5-04-T2-C
		DWG NO.	