
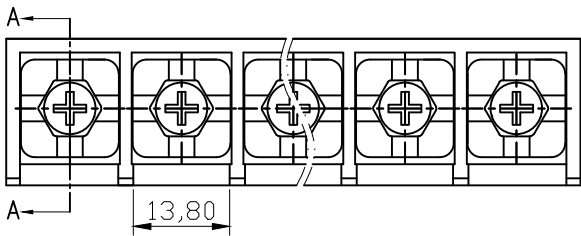
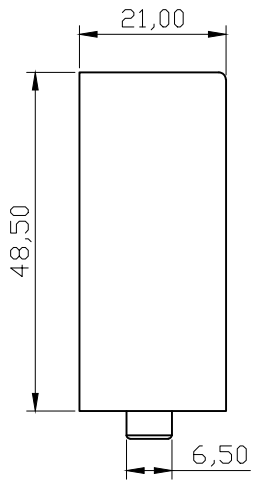
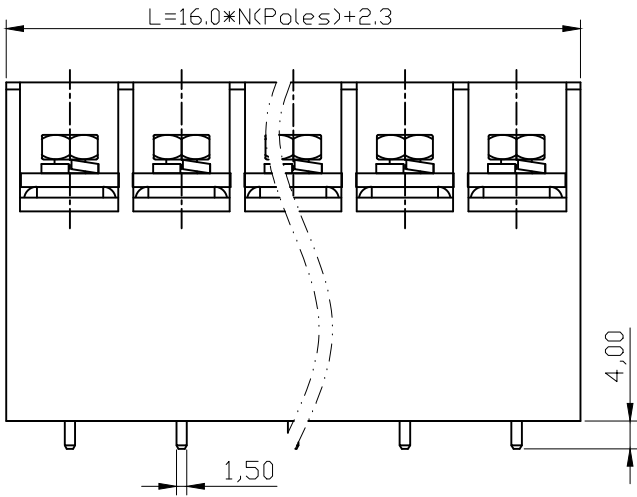


未注线性尺寸公差 Liner dimension tolerances						
0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6

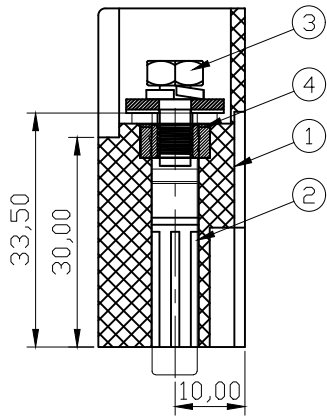

SECTION A-A


REV	DESCRIPTION	DRW.	DATE
A	RELEASE		

UL 技术参数					
UL Technical Data					
等级	Use Group		B	C	D
额定电压	Rated Voltage	[V]	600	/	600
额定电流	Rated Current	[A]	65	/	5
耐电压	Withstanding Voltage	[V]	AC 3000V/1Min		
IEC 技术参数					
IEC Technical Data					
过压类别	Overvoltage Category		III	III	II
污染等级	Contamination Class		3	2	2
额定电压	Rated Voltage	[V]	630	1000	1000
额定电流	Rated Current	[A]	76	76	76
冲击电压	Rate Impulse Voltage	[KV]	8	8	6
一般参数 Other Data					
线径范围	Wire Range	[AWG/mm²]	22~6/0.5~16		
剥线长度	Stripping length	[mm]	/		
位数范围	Poles		2P~12P		
工作温度	Operating temperature	[°C]	-40 ~ +105		
螺钉/扭力	Screw / Torque	/lbf.in	M5/25		
环保要求	RoHS Compliant		YES		

4	Nut	STEEL	Zn Plated
3	Screw	STEEL	Ni Plated
2	Pin header	BRASS	SN Plated
1	Housing	PA66+GF15%	UL94-V0
ITEM	NAME	MATERIAL	NOTES

TYPE				
CUSTOMER DRAWING 客户图档		PROJECTION		
DRFT	刘秀海	DATE	2026.03.15	UNITS: MM
CHKD	曾裕辉	DATE	2026.03.15	SCALE: 1:1
APPD	陈柏林	DATE	2026.03.15	SHEET 1 OF 1

赋安连电气 FORANY ELECTRIC	
TITLE BA8-XX-16.0-11	
DWG NO.	

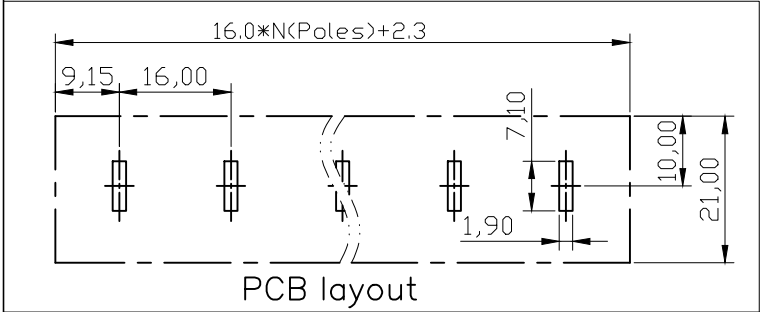

PCB layout