未注线性尺寸公差 Liner dimension tolerances						
0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6

REV	DESCRIPTION	DRW.	DATE
A	RELEASE		

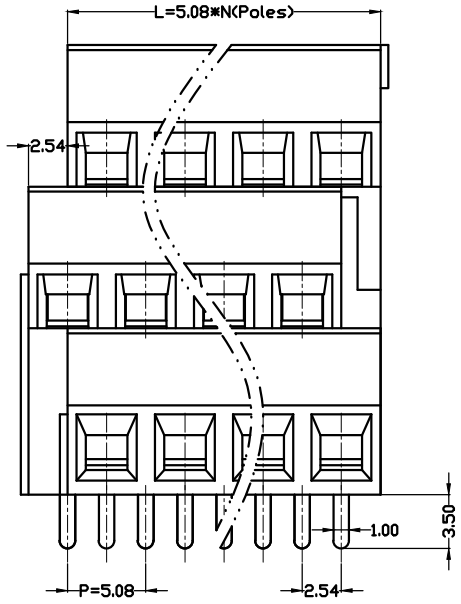

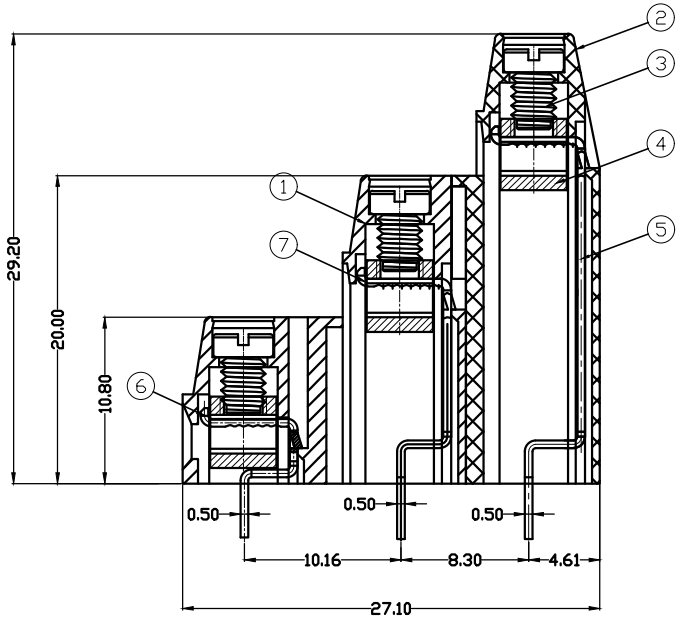

UL 技术参数 UL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	/	300
额定电流	Rated Current [A]	10	/	10
耐电压	Withstanding Voltage [V]	AC 2000V/1Min		
IEC 技术参数 IEC Technical Data				
过压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	13.5	13.5	13.5
冲击电压	Rate Impulse Voltage [KV]	4	4	4
一般参数 Other Data				
线径范围	Wire Range [AWG/mm²]	26～14/0.2～1.5		
剥线长度	Stripping length [mm]	5～6		
位数范围	Poles	02～24P		
工作温度	Operating temperature [°C]	-40 ～ +105		
螺钉/扭力	Screw / Torque /lbf.in	M3/5		
环保要求	RoHS Compliant	YES		

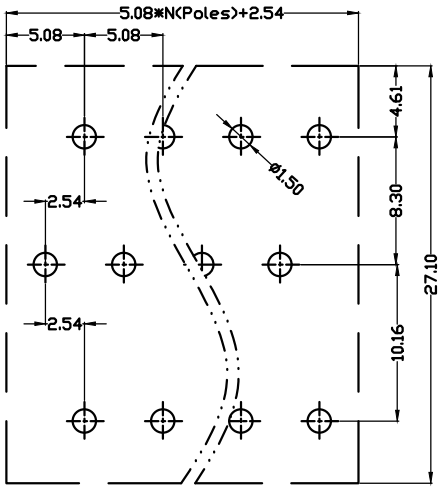

PCB LAYOUT

ITEM	NAME	MATERIAL	NOTES
7	Pin Header3	Brass	SN Plated
6	Pin Header2	Brass	SN Plated
5	Pin Header1	Brass	SN Plated
4	Cage	Brass	NI Plated
3	Screw	Steel	NI Plated
2	Housing 2	PA66	UL94-V0
1	Housing 1	PA66	UL94-V0

TYPE					
CUSTOMER DRAWING 客户图档		PROJECTION			赋安连电气 FORANY ELECTRIC
DRFT	刘秀海	DATE	2026.05.18	UNITS: MM	TITLE: EU1.5-XX-5.08-04B
CHKD	曾裕辉	DATE	2026.05.18	SCALE: 1:1	DWG NO.
APPD	陈柏林	DATE	2026.05.18	SHEET 1 OF 1	