
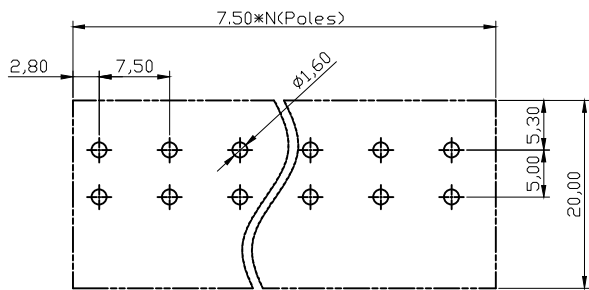
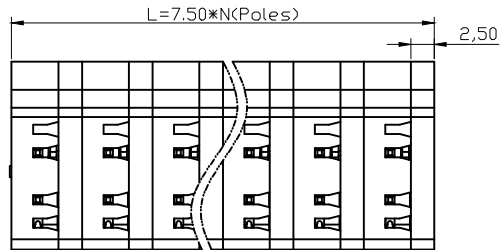


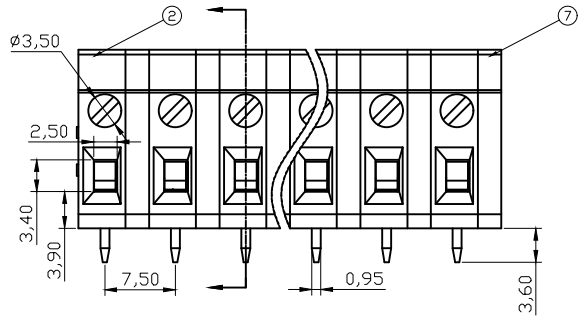


未注线性尺寸公差 Liner dimension tolerances

0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6



PCB Layout

REV	DESCRIPTION	DRW.	DATE
A	RELEASE		

UL 技术参数				
UL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	/	300
额定电流	Rated Current [A]	15	/	10
耐电压	Withstanding Voltage [V]	AC 2500V/1Min		
IEC 技术参数				
IEC Technical Data				
过压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
冲击电压	Rate Impulse Voltage [KV]	4	4	4
一般参数 Other Data				
线径范围	Wire Range [AWG/mm <sup>2</sup> ]	30~14/0.5~2.5		
剥线长度	Stripping length [mm]	11~12		
位数范围	Poles	02~24P		
工作温度	Operating temperature [°C]	-40 ~ +105		
螺钉/扭力	Screw / Torque / lbf.in	M2.5/4		
环保要求	RoHS Compliant	YES		

7	Clapboard	PA66	UL94-V0
6	Screw	Steel	Zn Plated
5	Cam	Steel	Zn Plated
4	Clamp Cage	Steel	Zn Plated
3	Pin Header	Brass	SN Plated
2	Housing 2	PA66	UL94-V0
1	Housing 1	PA66	UL94-V0
ITEM	NAME	MATERIAL	NOTES

TYPE		PROJECTION		UNITS: MM	
CUSTOMER DRAWING 客户图档				SCALE: 1:1	
DRFT	刘秀海	DATE	2026.05.18	SHEET 1 OF 1	
CHKD	曾裕辉	DATE	2026.05.18		
APPD	陈柏林	DATE	2026.05.18		

 <b>赋安连电气</b> FORANY ELECTRIC	
TITLE	
EU1.5-XX-7.50-07-S1X	
DWG NO.	