
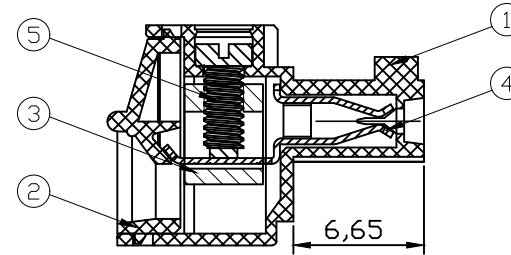
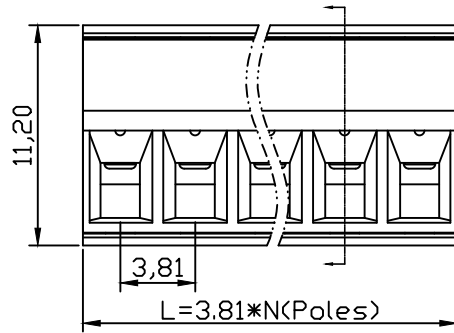



未注线性尺寸公差 Liner dimension tolerances

0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6

REV	DESCRIPTION	DRW.	DATE
A	RELEASE		

UL 技术参数			
UL Technical Data			
等级	Use Group	B	C D
额定电压	Rated Voltage [V]	300	/ 300
额定电流	Rated Current [A]	8	/ 8
耐电压	Withstanding Voltage [V]	AC 1600V/1Min	
IEC 技术参数			
IEC Technical Data			
过压类别	Overvoltage Category	III	III II
污染等级	Contamination Class	3	2 2
额定电压	Rated Voltage [V]	160	160 320
额定电流	Rated Current [A]	9	9 9
冲击电压	Rate Impulse Voltage [KV]	2.5	2.5 2.5
一般参数 Other Data			
线径范围	Wire Range [AWG/mm <sup>2</sup> ]	28~16/0.2~1.5	
剥线长度	Stripping length [mm]	6~8	
位数范围	Poles	02~24P	
工作温度	Operating temperature [°C]	-40 ~ +105	
螺钉/扭力	Screw / Torque / lbf.in	M2/2	
环保要求	RoHS Compliant	YES	

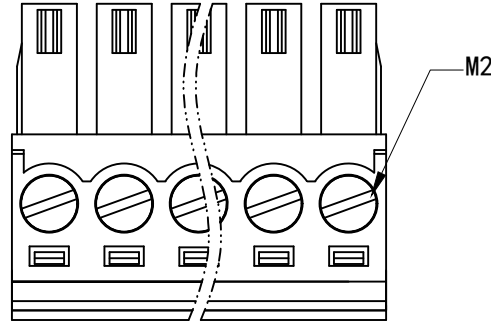

5	Screw	STEEL	Zn Plated
4	Clamp	Copper alloy	Sn Plated
3	Cage	BRASS	Ni Plated
2	Cover	PA66	UL94-V0
1	Housing	PA66	UL94-V0
ITEM	NAME	MATERIAL	NOTES

TYPE CUSTOMER DRAWING 客户图档		PROJECTION			
DRFT	刘秀海	DATE	2026.03.15	UNITS:	MM
CHKD	曾裕辉	DATE	2026.03.15	SCALE:	1:1
APPD	陈柏林	DATE	2026.03.15	SHEET	1 OF 1

<b>PL1.5B-XX-3.81-00</b>	
DWG NO.	