


未注线性尺寸公差 Liner dimension tolerances

0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6

REV	DESCRIPTION	DRW.	DATE
A	RELEASE		

UL 技术参数 UL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	/	300
额定电流 Rated Current [A]	8	/	8
耐电压 Withstanding Voltage [V]	AC 1600V/1Min		
IEC 技术参数 IEC Technical Data			
过压类别 Overvoltage Category	III	III	II
污染等级 Contamination Class	3	2	2
额定电压 Rated Voltage [V]	160	160	320
额定电流 Rated Current [A]	9	9	9
冲击电压 Rate Impulse Voltage [KV]	2.5	2.5	2.5
一般参数 Other Data			
线径范围 Wire Range [AWG/mm ²]	28~16/0.2~1.5		
剥线长度 Stripping length [mm]	6~8		
位数范围 Poles	02~24P		
工作温度 Operating temperature [°C]	-40 ~ +105		
螺钉/扭力 Screw / Torque / lbf.in	M2/2		
环保要求 RoHS Compliant	YES		

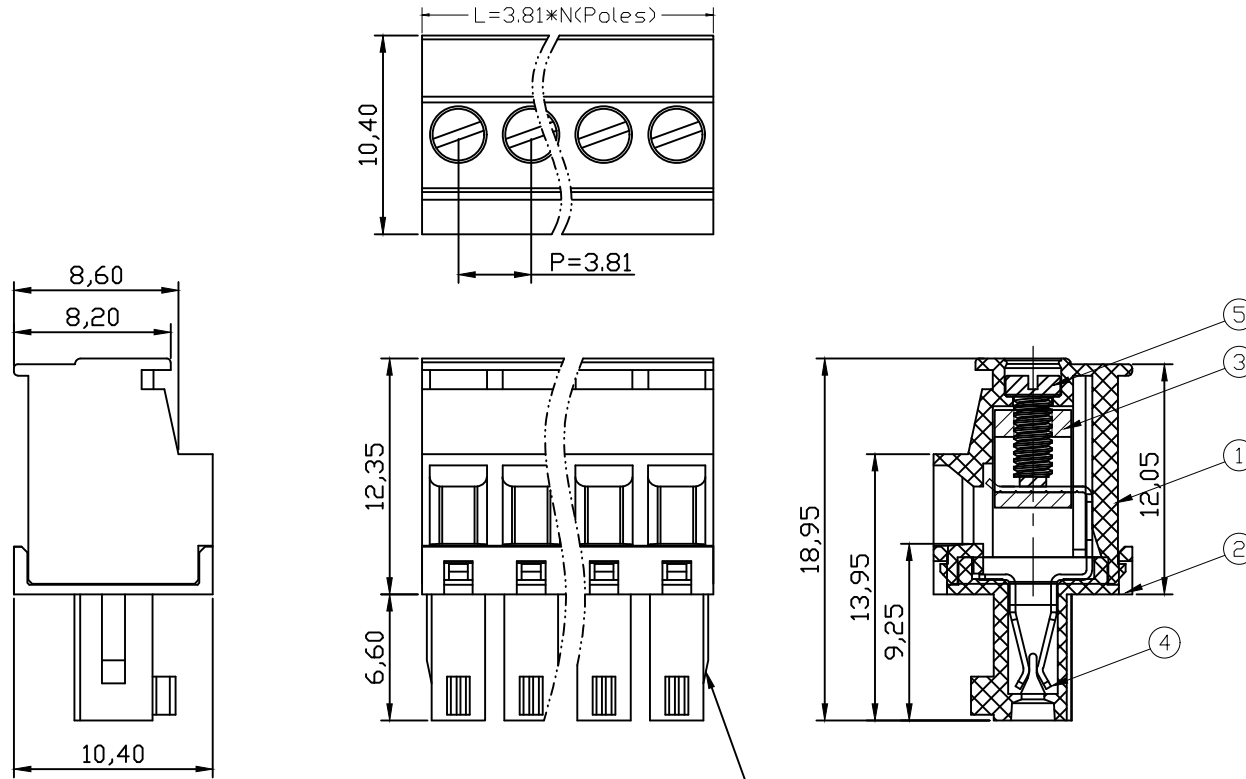

1-5位两侧有此筋
5位以上无此筋

技术要求:

1. 螺钉应能上下自由锁退，不能卡死，脱落。
2. 无明显外观及装配不良。

5	Screw	STEEL	Zn Plated
4	Clamp	Copper alloy	SN Plated
3	Cage	BRASS	Ni Plated
2	Cover	PA66	UL94-V0
1	Housing	PA66	UL94-V0
ITEM	NAME	MATERIAL	NOTES

TYPE CUSTOMER DRAWING 客户图档		PROJECTION			
DRFT	刘秀海	DATE	2026.03.15	UNITS:	MM
CHKD	曾裕辉	DATE	2026.03.15	SCALE:	1:1
APPD	陈柏林	DATE	2026.03.15	SHEET	1 OF 1

 赋安连电气 FORANY ELECTRIC	
TITLE PL1.5B-XX-3.81-01	
DWG NO.	