未注线性尺寸公差 Liner dimension tolerances						
0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6

REV	DESCRIPTION	DRW.	DATE
A	RELEASE		

UL 技术参数 UL Technical Data				
等级 Use Group	B	C	D	
额定电压 Rated Voltage [V]	300	50	300	
额定电流 Rated Current [A]	8	8	8	
耐电压 Withstanding Voltage [V]	AC 1600V/1Min			
IEC 技术参数 IEC Technical Data				
过压类别 Overvoltage Category	III	III	II	
污染等级 Contamination Class	3	2	2	
额定电压 Rated Voltage [V]	200	200	400	
额定电流 Rated Current [A]	9	9	9	
冲击电压 Rate Impulse Voltage [KV]	2.5	2.5	2.5	
一般参数 Other Data				
线径范围 Wire Range [AWG/mm²]	/			
剥线长度 Stripping length [mm]	/			
位数范围 Poles	02～24P			
工作温度 Operating temperature [°C]	-40 ～ +105			
螺钉/扭力 Screw / Torque /lbf.in	/			
环保要求 RoHS Compliant	YES			





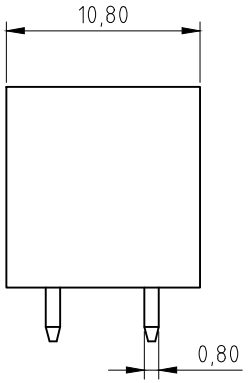

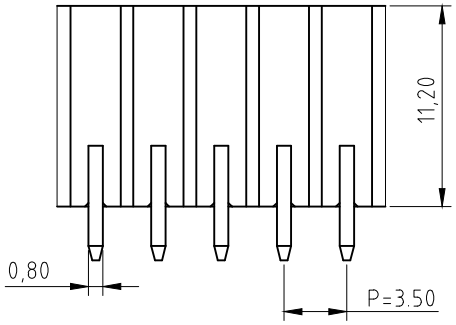

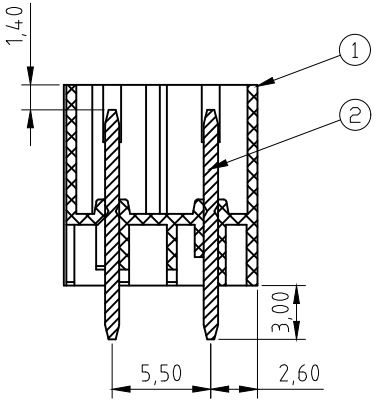

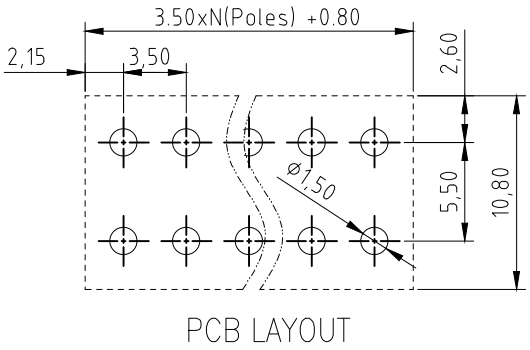

ITEM	NAME	MATERIAL	NOTES
2	Pin Header	BRASS	SN Plated
1	Housing	PA66	UL94-V0

TYPE CUSTOMER DRAWING 客户图档		PROJECTION		UNITS: MM	赋安连电气 FORANY ELECTRIC
DRFT	刘秀海	DATE	2026.03.15		TITLE PL1.5S-XX-3.50-05V
CHKD	曾裕辉	DATE	2026.03.15	SCALE: 1:1	
APPD	陈柏林	DATE	2026.03.15	SHEET 1 OF 1	DWG NO.