
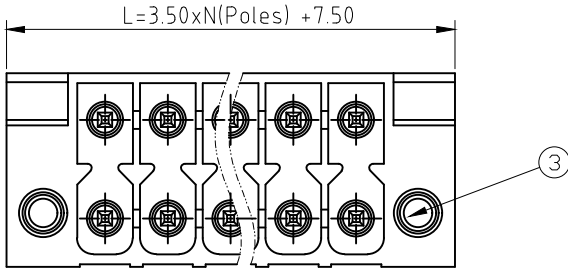
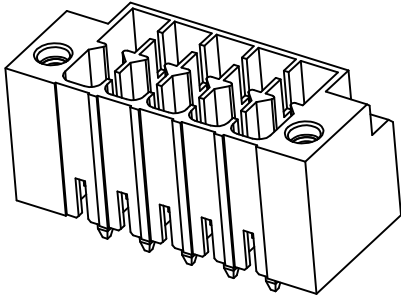
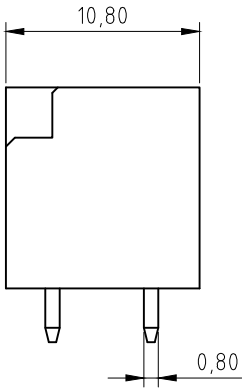
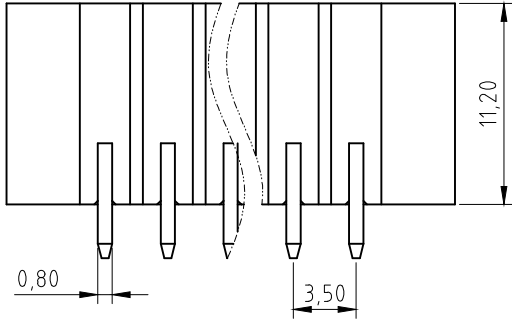
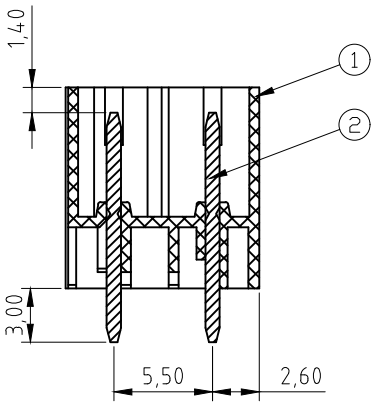


未注线性尺寸公差 Liner dimension tolerances						
0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6

REV	DESCRIPTION	DRW.	DATE
A	RELEASE		

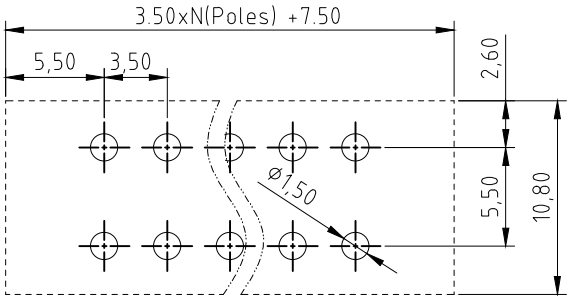

PCB LAYOUT

UL 技术参数					
UL Technical Data					
等级	Use Group		B	C	D
额定电压	Rated Voltage	[V]	300	50	300
额定电流	Rated Current	[A]	8	8	8
耐电压	Withstanding Voltage	[V]	AC 1600V/1Min		
IEC 技术参数					
IEC Technical Data					
过压类别	Overvoltage Category		III	III	II
污染等级	Contamination Class		3	2	2
额定电压	Rated Voltage	[V]	200	200	400
额定电流	Rated Current	[A]	9	9	9
冲击电压	Rate Impulse Voltage	[KV]	2.5	2.5	2.5
一般参数 Other Data					
线径范围	Wire Range	[AWG/mm ²]	/		
剥线长度	Stripping length	[mm]	/		
位数范围	Poles		02~24P		
工作温度	Operating temperature	[°C]	-40 ~ +105		
螺钉/扭力	Screw / Torque	/lbf.in	M2/2		
环保要求	RoHS Compliant		YES		

3	Nut	STEEL	Zn Plated
2	Pin Header	BRASS	SN Plated
1	Housing	PA66	UL94-V0
ITEM	NAME	MATERIAL	NOTES

TYPE CUSTOMER DRAWING 客户图档		PROJECTION		☉ ◁
DRFT	刘秀海	DATE	2026.03.15	UNITS: MM
CHKD	曾裕辉	DATE	2026.03.15	SCALE: 1:1
APPD	陈柏林	DATE	2026.03.15	SHEET 1 OF 1

TITLE		DWG NO.	
PL1.5S-XX-3.50-05VF			