
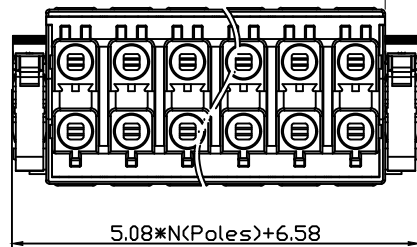
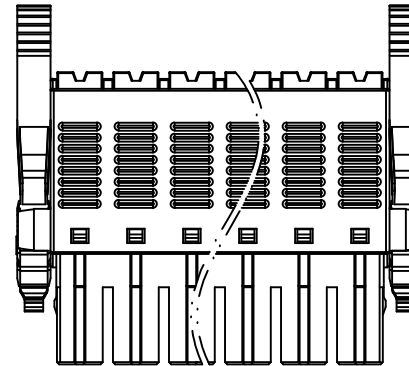
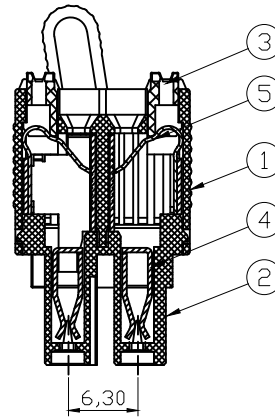
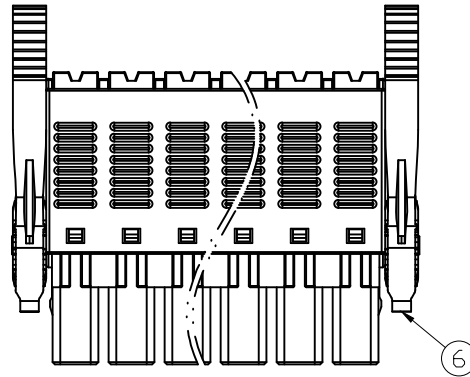
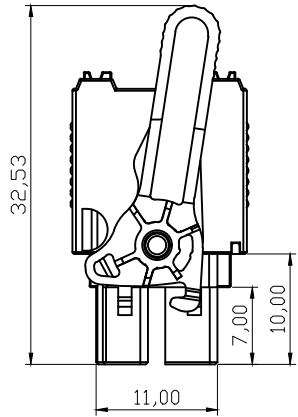
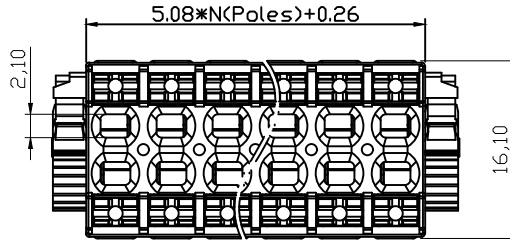


未注线性尺寸公差 Liner dimension tolerances

0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6

REV	DESCRIPTION	DRW.	DATE
A	RELEASE		

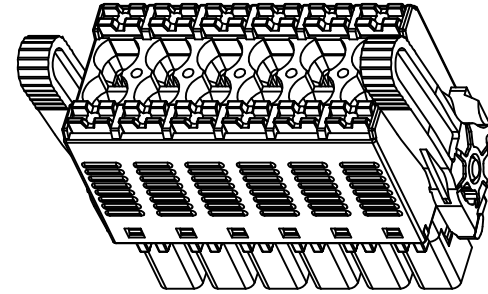

UL 技术参数			
UL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	/	300
额定电流 Rated Current [A]	10	/	10
耐电压 Withstanding Voltage [V]	AC 1600V/1Min		
IEC 技术参数			
IEC Technical Data			
过压类别 Overvoltage Category	III	III	II
污染等级 Contamination Class	3	2	2
额定电压 Rated Voltage [V]	250	400	630
额定电流 Rated Current [A]	8	8	8
冲击电压 Rate Impulse Voltage [KV]	4	4	4
一般参数 Other Data			
线径范围 Wire Range [AWG/mm ²]	24~16/0.2~1.5		
剥线长度 Stripping length [mm]	8~10		
位数范围 Poles	02~24P		
工作温度 Operating temperature [°C]	-40 ~ +105		
螺丝扭矩 Screw torque(Max) [lbf.in]	/		
环保要求 RoHS Compliant	YES		

6	Lock hook	POM	Orange
5	Spring	Stainless Steel	/
4	Clip	Copper alloy	SN Plated
3	Button	PA66GF	Orange
2	Cover	PA66	UL94-V0
1	Housing	PA66GF	UL94-V0
ITEM	NAME	MATERIAL	NOTES

TYPE CUSTOMER DRAWING 客户图档		PROJECTION			
DRFT	刘秀海	DATE	2026. 3. 15	UNITS: MM	TITLE PL2.5B-XX-5.08-07B
CHKD	曾裕辉	DATE	2026. 3. 15	SCALE: 1:1	
APPD	陈柏林	DATE	2026. 3. 15	SHEET 1 OF 1	
DWG NO.					

赋安连电气
FORANY ELECTRIC

PL2.5B-XX-5.08-07B