


未注线性尺寸公差 Liner dimension tolerances						
0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6

REV	DESCRIPTION	DRW.	DATE
A	RELEASE		

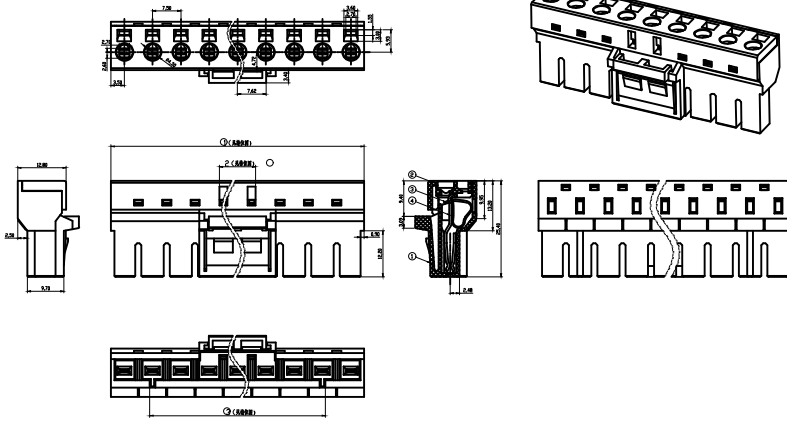


UL 技术参数 Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	600
额定电流 Rated Current [A]	15	15	5
耐电压 Withstanding Voltage [V]	AC 2500V/1Min		
IEC 技术参数 IEC Technical Data			
过压类别 Overvoltage Category	III	III	II
污染等级 Contamination Class	3	2	2
额定电压 Rated Voltage [V]	500	630	1000
额定电流 Rated Current [A]	20	20	20
冲击电压 Spike Impulse Voltage [kV]	6	6	6
一般参数 Other Data			
线径范围 Wire Range [AWG/mm ²]	30~12/0.2~2.5		
剥线长度 Stripping length [mm]	9~11		
位数范围 Poles	02~12P		
工作温度 Operating temperature [°C]	-40 ~ +105		
螺钉/扭力 Screws / Torque [N.m]	/		
环保要求 RoHS Compliant	YES		

4	Clamp Sheet	C5191	SN Plated
3	Spring	SUS301	/
2	Cover	PA66	UL94-V0
1	Housing	PBT+GF30%	UL94-V0
ITEM	NAME	MATERIAL	NOTES

TYPE	PROJECTION		TITLE	
CUSTOMER DRAWING 客户图样			赋安连电气 FORANY ELECTRIC	
DRFT 刘秀海	DATE 2026.03.15	UNITS: MM	TITLE PL2.5B-XX-7.50-04	
CHKD 曾裕辉	DATE 2026.03.15	SCALE: 1:1	DRW. NO.	
APPD 陈柏林	DATE 2026.03.15	SHEET 1 OF 1		

未注线性尺寸公差 Liner dimension tolerances						
0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6

REV	DESCRIPTION	DRW.	DATE
A	RELEASE		

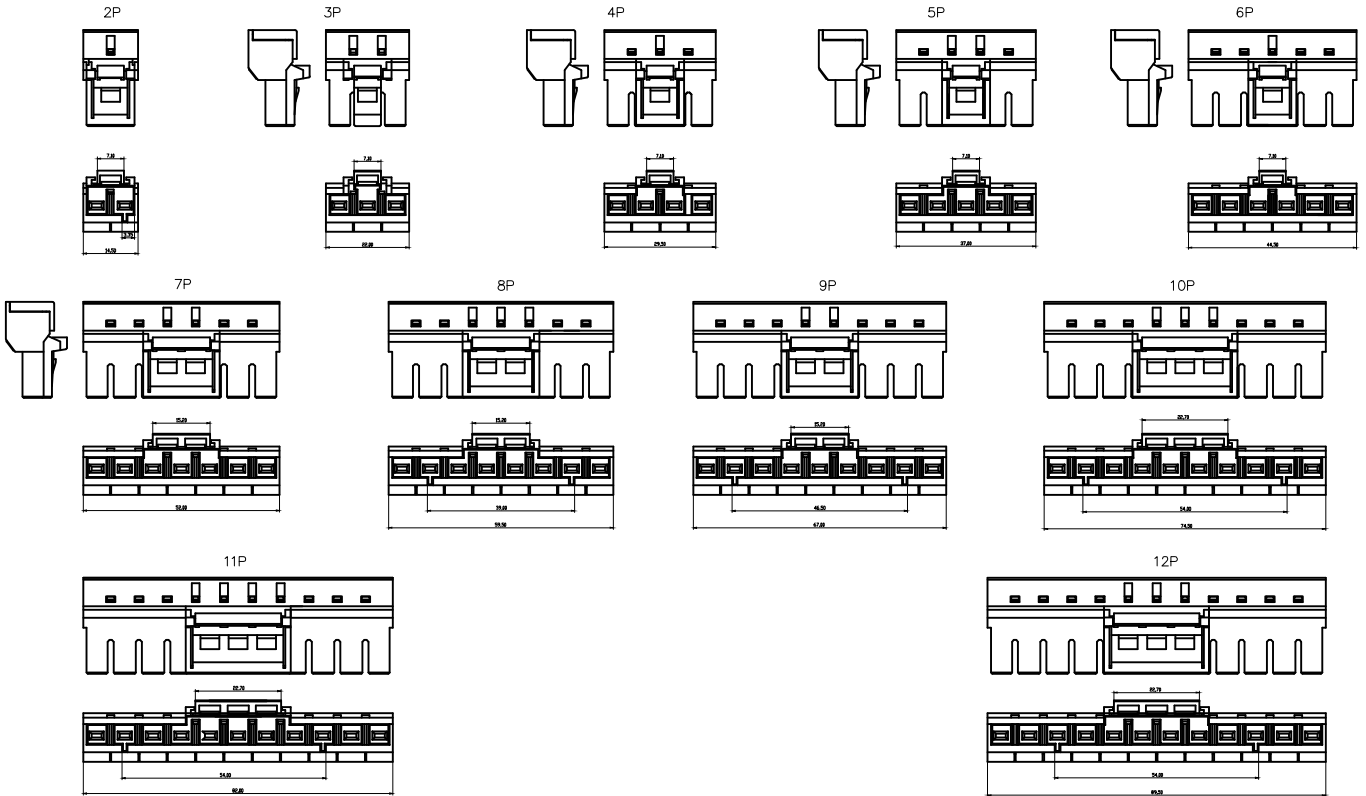

TYPE	PROJECTION		TITLE	
CUSTOMER DRAWING 客户图样			赋安连电气 FORANY ELECTRIC	
DRFT 刘秀海	DATE 2026.03.15	UNITS: MM	TITLE PL2.5B-XX-7.50-04排位图	
CHKD 曾裕辉	DATE 2026.03.15	SCALE: 1:1	DRW. NO.	
APPD 陈柏林	DATE 2026.03.15	SHEET 1 OF 1		