
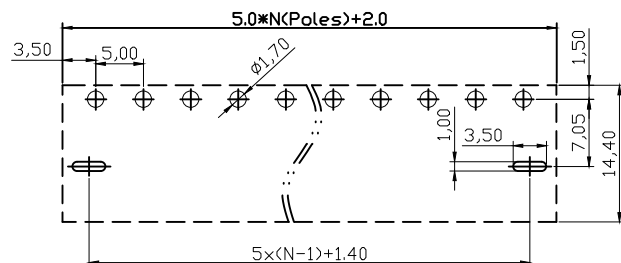
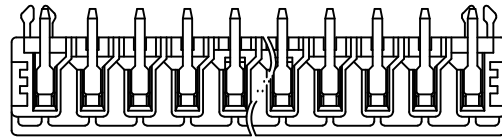
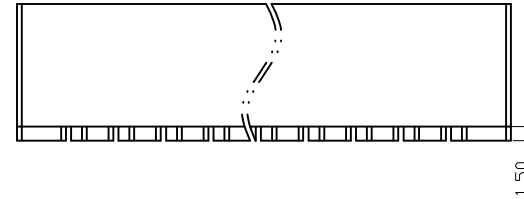

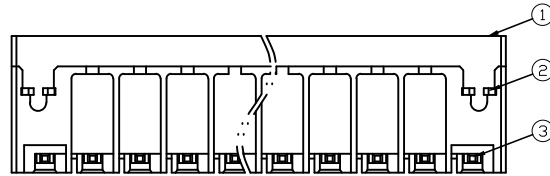

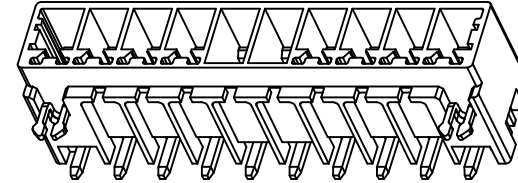


未注线性尺寸公差 Liner dimension tolerances

0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6

REV	DESCRIPTION	DRW.	DATE
-	RELEASE		

UL 技术参数			
UL Technical Data			
等级	Use Group	B	C D
额定电压	Rated Voltage [V]	300	/ 300
额定电流	Rated Current [A]	20	/ 10
耐电压	Withstanding Voltage [V]	AC 1600V/1Min	
IEC 技术参数			
IEC Technical Data			
过压类别	Overvoltage Category	III	III II
污染等级	Contamination Class	3	2 2
额定电压	Rated Voltage [V]	320	320 630
额定电流	Rated Current [A]	20	20 20
冲击电压	Rate Impulse Voltage [KV]	4	4 4
一般参数 Other Data			
线径范围	Wire Range [AWG/mm ²]	/	
剥线长度	Stripping length [mm]	/	
位数范围	Poles	02~24P	
工作温度	Operating temperature [°C]	-40 ~ +105	
螺丝扭矩	Screw torque(Max) [mm]	/	
环保要求	RoHS Compliant	YES	

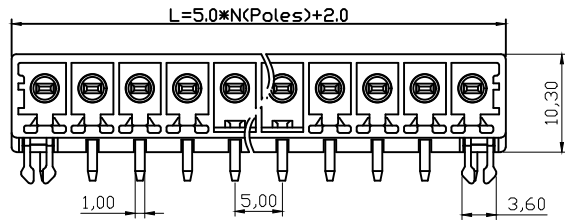

PCB LAYOUT

3	Pin_Header	Copper	SN Plated
2	Position_fork	Brass	SN Plated
1	Housing	PA66GF	UL94-V0
ITEM	NAME	MATERIAL	NOTES

TYPE		CUSTOMER DRAWING		PROJECTION		
		客户图档				
DRFT	刘秀海	DATE	2026.03.15	UNITS:	MM	TITLE
CHKD	曾裕辉	DATE	2026.03.15	SCALE:	1:1	
APPD	陈柏林	DATE	2026.03.15	SHEET	1 OF 1	


赋安连电气
 FORANY ELECTRIC

PL2.5S-XX-5.0-07

DWG NO.