
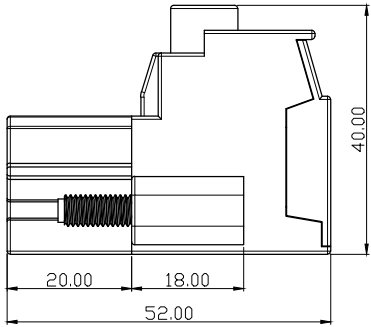




未注线性尺寸公差 Liner dimension tolerances						
0~6	6~10	>10~30	>30~60	>60~100	>100~160	>160
±0.2	±0.3	±0.5	±0.7	±1.0	±1.3	±1.6

REV	DESCRIPTION	DRW.	DATE
A	RELEASE		

UL 技术参数				
UL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	115	115	5
耐电压	Withstanding Voltage [V]	AC 2200V/1Min		
IEC 技术参数				
IEC Technical Data				
过压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class		2	2
额定电压	Rated Voltage [V]		1000	1000
额定电流	Rated Current [A]		125	125
冲击电压	Rate Impulse Voltage [KV]		8	6
一般参数 Other Data				
线径范围	Wire Range [AWG/mm²]	20~2/0.5~35		
剥线长度	Stripping length [mm]	19~20		
位数范围	Poles	02~10P		
工作温度	Operating temperature [°C]	-40 ~ +105		
螺钉/扭力	Screw / Torque /lbf.in	M5/35		
环保要求	RoHS Compliant	YES		

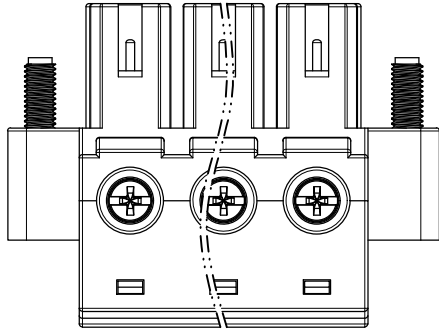

SECTION B-B

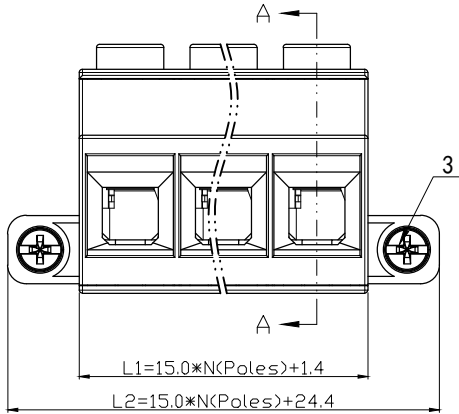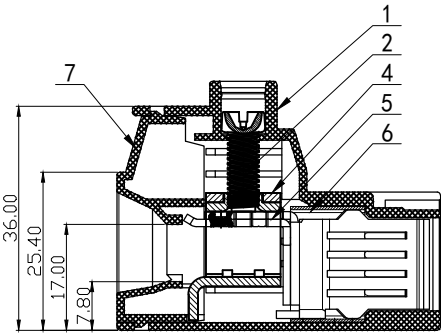

SECTION A-A

7	Cover	PA66	UL94-V0
6	Overspring	Stainless Steel	/
5	Clamp	Copper alloy	Ni Plated
4	Cage	Steel	Ni Plated
3	Screw	Steel	Ni Plated
2	Screw	Steel	Ni Plated
1	Housing	PA66	UL94-V0
ITEM	NAME	MATERIAL	NOTES

TYPE CUSTOMER DRAWING 客户图档		PROJECTION			 赋安连电气 FORANY ELECTRIC	
DRFT		DATE		UNITS: MM		TITLE PL25B-XX-15.0-00F 装配图
CHKD		DATE		SCALE: 1:1		
APPD		DATE		SHEET 1 OF 1		DWG NO.

